

Waterproof switches

INT-1129S Series

6.2x6.2mm, Ø2.2mm Stem, Metal cover, Surface mount type

Features : IP67 dust & water resistance

Applications : Home appliances or Industrial equipments
used around water

Specifications :


| | |
|--------------------|-------------|
| Rating | DC 12V 50mA |
| Contact resistance | 100mΩ Max. |
| Travel (mm) | 0.3±0.1 |



Model list :

| Model No. | Length (mm) | Operating force | Pitch (mm) | Life | QTY per pack (Tape & reel) |
|---------------|-------------|-----------------|------------|---------------------|----------------------------|
| INT-1129S43AP | 4.3 | 200±50gf | 9.0 | 100,000 Cycles Min. | 1K |
| INT-1129S50AP | 5.0 | | | | 750 |
| INT-1129S69AP | 6.9 | | | | 500 |
| INT-1129S70AP | 7.0 | | | | 1K |
| INT-1129S80AP | 8.0 | | | | 750 |
| INT-1129S43BP | 4.3 | 250±70gf | 10 | | 500 |
| INT-1129S50BP | 5.0 | | | | 1K |
| INT-1129S69BP | 6.9 | | | | 750 |
| INT-1129S70BP | 7.0 | | | | 500 |
| INT-1129S80BP | 8.0 | | | | 1K |
| INT-1129S43AQ | 4.3 | 200±50gf | 9.0 | | 750 |
| INT-1129S50AQ | 5.0 | | | | 500 |
| INT-1129S69AQ | 6.9 | | | | 1K |
| INT-1129S70AQ | 7.0 | | | | 750 |
| INT-1129S80AQ | 8.0 | | | | 500 |
| INT-1129S43BQ | 4.3 | 250±70gf | 10 | 1K | |
| INT-1129S50BQ | 5.0 | | | 750 | |
| INT-1129S69BQ | 6.9 | | | 500 | |
| INT-1129S70BQ | 7.0 | | | 1K | |
| INT-1129S80BQ | 8.0 | | | 750 | |

Drawing :

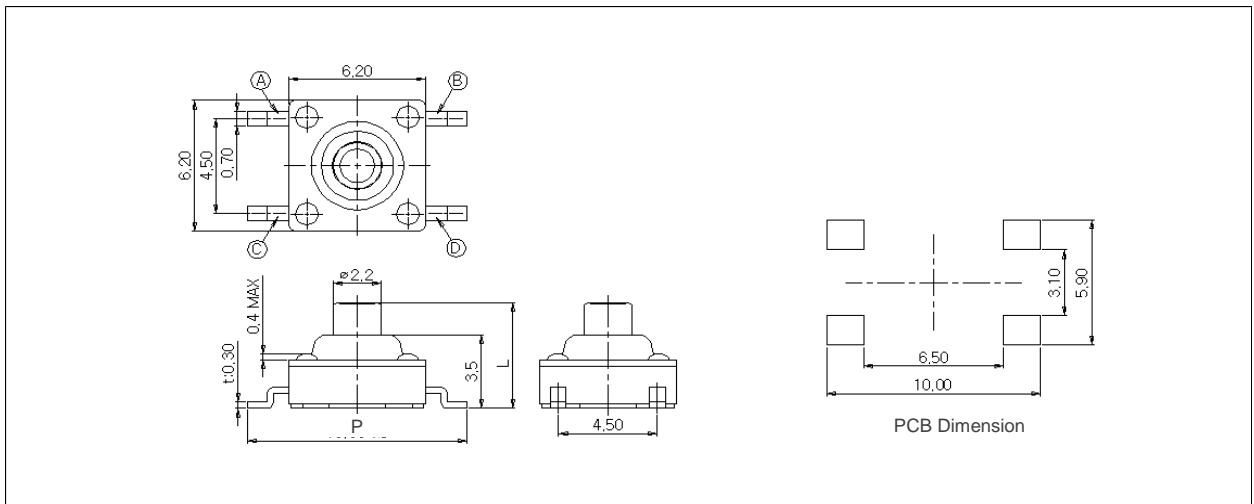

Waterproof switches

INT-1129S Series

6.2x6.2mm, Ø2.2mm Stem, Metal cover, Surface mount type

Circuit diagram :

