


Sealed SMT Tact switches

INT-1162S Series

6.2×6.2mm, Sealed with Rubber stem, Surface mount type

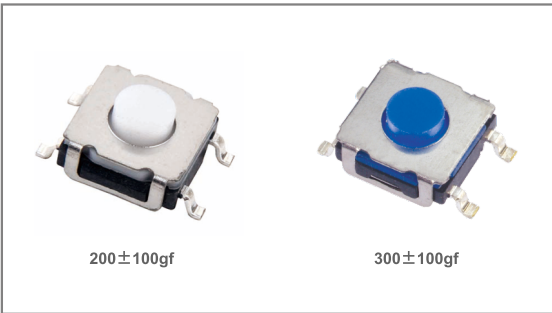

- **Features** : Rubber stem provides soft feeling
- **Applications** : PC & Peripherals, Car AV equipments, Automobile, Communications devices
- **Specifications** :

Rating	DC 12V 50mA
Contact resistance	100mΩ Max.
Travel (mm)	0.4+0.2/-0.1

► Part list

Part No.		Length (mm)	Operating force	Pitch (mm)		Life	QTY per pack (Tape & reel)
				P	Q		
INT-1162S26AP	INT-1162S26AQ	2.6	200±100gf	9.0	10.0	100,000 Cycles Min.	1.6K
INT-1162S34AP	INT-1162S34AQ	3.4					
INT-1162S38AP	INT-1162S38AQ	3.8					
INT-1162S43AP	INT-1162S43AQ	4.3					1K
INT-1162S45AP	INT-1162S45AQ	4.5					
INT-1162S49AP	INT-1162S49AQ	4.9					
INT-1162S51AP	INT-1162S51AQ	5.1					
INT-1162S52AP	INT-1162S52AQ	5.2					
INT-1162S55AP	INT-1162S55AQ	5.5					
INT-1162S26BP	INT-1162S26BQ	2.6					
INT-1162S34BP	INT-1162S34BQ	3.4					
INT-1162S38BP	INT-1162S38BQ	3.8					
INT-1162S43BP	INT-1162S43BQ	4.3	1K				
INT-1162S45BP	INT-1162S45BQ	4.5					
INT-1162S49BP	INT-1162S49BQ	4.9					
INT-1162S51BP	INT-1162S51BQ	5.1					
INT-1162S52BP	INT-1162S52BQ	5.2					
INT-1162S55BP	INT-1162S55BQ	5.5					

* Long life (1KK cycles) is available and part numbers in long life change to INT-1162S26AP(Q)L-INT-1162S55AP(Q)L

► Drawing

