


# Slide switches

## INS-1235B Series

8.5×3.5mm with 3.5mm Height, 1C 2P, Non shorting, 2mm Travel, Through hole type

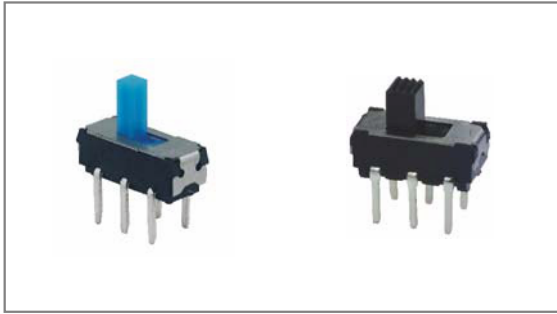

- **Features** : Subminiature slide switch for compact & high density design
- **Applications** : Computer & peripherals, Telecommunication, Consumer electronics, Instrumentation, Test & measurement

► **Specifications** :

Rating	DC 6V 0.3A
Contact resistance	70mΩ Max.
Travel (mm)	2.0

► **Part list**

Part No.	Knob size (mm)		Operating force	Life	QTY per pack (Plastic bag)	Remarks
	Length (mm)	□ (mm)				
INS-1235B2015	2.0	1.5×1.5	200±100gf	10,000 Cycles Min.	1K	without serration
INS-1235B20	2.0	2.0×2.0				with serration
INS-1235B30	3.0	2.0×2.0				
INS-1235B44	4.4	2.0×2.0				

► **Drawing**

Without serration	With serration
	<p><b>Circuit diagram</b></p>
<p><b>PCB Dimension</b></p>	<p><b>Circuit diagram</b></p>
	<p><b>PCB Dimension</b></p>

- TACT Switches
- PUSH Switches
- HOOK Switches
- DETECTOR Switches
- SLIDE Switches
- ROTARY Potentiometers
- LEVER Switches
- ROTARY Switches
- CAPS