


Slide switches

INS-1270V

9.0×3.5mm with 3.5mm Height, 1C 2P, Non shorting, 2mm Travel, Through hole type, Side slide

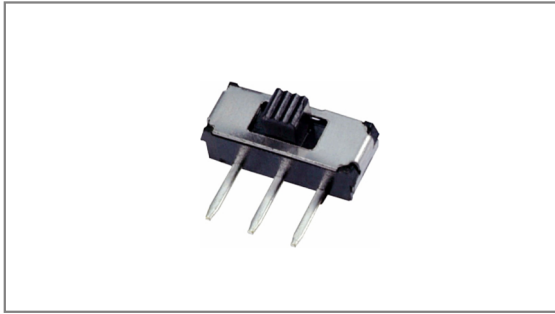

- **Features :** Subminiature slide switch for compact & high density design
- **Applications :** Computer & peripherals, Telecommunication, Consumer electronics, Instrumentation, Test & measurement
- **Specifications :**

Rating	DC 6V 0.3A
Contact resistance	70mΩ Max.
Travel (mm)	2.0

► Part list

Part No.	Knob size (mm)		Operating force	Life	QTY per pack (Plastic bag)	Remarks
	Length (mm)	□ (mm)				
INS-1270V2015	2.0	1.5×1.5	200±100gf	10,000 Cycles Min.	1K	without serration
INS-1270V20	2.0	2.0×2.0				with serration
INS-1270V30	3.0	1.5×1.5				without serration
INS-1270V40	4.0	1.5×1.5				
INS-1270V44	4.4	2.0×2.0				
INS-1270V60	6.0	2.0×2.0				with serration

► Drawing

Without serration		With serration	
	<p>Circuit diagram</p>		<p>Circuit diagram</p>
<p>PCB Dimension</p>	<p>PCB Dimension</p>		

TACT Switches
 PUSH Switches
 HOOK Switches
 DETECTOR Switches
 SLIDE Switches
 ROTARY Potentiometers
 LEVER Switches
 ROTARY Switches
 CAPS