

Push switches

INP-2216BAN, 2216BAS

5.8×5.8mm, 2C 2P, Non shorting, Non lock & Self lock

TACT Switches

PUSH Switches

HOOK Switches

DETECTOR Switches


SLIDE Switches

ROTARY Potentiometers

LEVER Switches

ROTARY Switches

CAPS

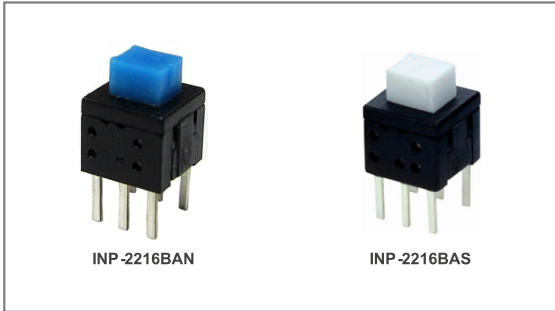

- **Features** : Non lock & self lock Compact design
- **Applications** : Consumer electronics, Automotive, Audio visual equipments, Telecommunications
- **Specifications** :

Rating	DC 30V 0.1A
Contact resistance	70mΩ Max.
Travel (mm)	Full : 1.9 Lock : 1.0

► Part list

Part No.	□ Knob size (mm)	Operating mode	Operating force	Life	QTY per pack (Plastic bag)
INP-2216BAN	2.9×3.5	Non lock	300±80gf	10,000 Cycles Min.	1K
INP-2216BAS		Self lock			

► Drawing

