


Push switches

INP-2216B Series 5.8×5.8mm, 2C 2P, Non shorting, Non lock & Self lock

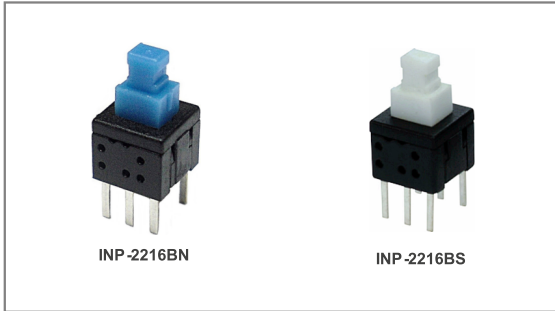

- ▶ **Features :** Non lock & self lock Compact design
- ▶ **Applications :** Consumer electronics, Automotive, Audio visual equipments, Telecommunications
- ▶ **Specifications :**

Rating	DC 30V 0.1A
Contact resistance	70mΩ Max.
Travel (mm)	Full : 1.9 Lock : 1.0

▶ **Part list**

Part No.	□ Knob size (mm)	Operating mode	Operating force	Life	QTY per pack (Plastic bag)
INP-2216BN20A	2.0×2.5	Non lock	180±80gf	10,000 Cycles Min.	1K
INP-2216BN25A	2.5×2.5				
INP-2216BN20B	2.0×2.5		300±80gf		
INP-2216BN25B	2.5×2.5				
INP-2216BS20A	2.0×2.5	Self lock	180±80gf	10,000 Cycles Min.	1K
INP-2216BS25A	2.5×2.5				
INP-2216BS20B	2.0×2.5		300±80gf		
INP-2216BS25B	2.5×2.5				

▶ **Drawing**

